




Combined Cabling Cable GJPFJH

Product Structure

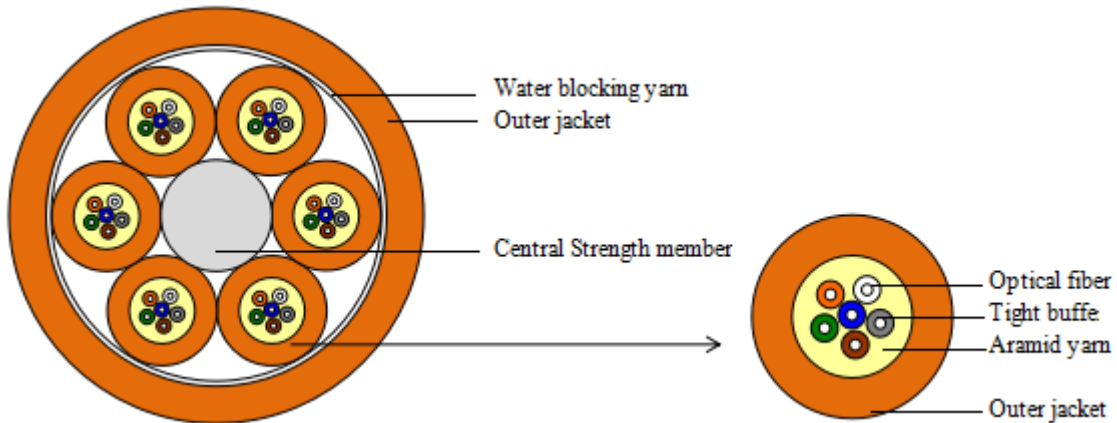

Product Description

GJPFJH (Tight buffer fiber structure, Stranded structure, Aramid yarn strength member, LSZH jacket)

Standard

YD/T 1258. 4-2005 Indoor fiber optical cable Dual core cable

Technical Parameters

| Fiber count | Structure | Specifications (mm) | Weight (kg/km) | Tensile(N) | | Crush(N) | | Bending Radius(mm) | |
|-------------|-----------|---------------------|----------------|------------|------------|-----------|------------|--------------------|----------|
| | | | | Long term | Short term | Long term | Short term | Static | Dynami c |
| 24 | 1+4 | 14.5 | 176 | 500 | 1000 | 300 | 1000 | 10D | 20D |
| 48 | 1+6 | 17.6 | 279 | 600 | 1500 | 300 | 1000 | 10D | 20D |
| 60 | 1+5 | 18.1 | 284 | 600 | 1500 | 300 | 1000 | 10D | 20D |



| | | | | | | | | | |
|----|-----|------|-----|------|------|-----|------|-----|-----|
| 72 | 1+6 | 19.7 | 340 | 1000 | 2000 | 300 | 1000 | 10D | 20D |
| 96 | 1+8 | 23.1 | 476 | 1100 | 2200 | 300 | 1000 | 10D | 20D |

Note: 1.D refers to the cable diameter;

2.The relevant technical parameters can be adjusted according to the customer's demands;

3.PVC and other materials can be used as jacket according to the customer's demands.

E-mail: info@sopto.com.cn

Web : <http://www.sopto.com.cn>