




GJYXFCH

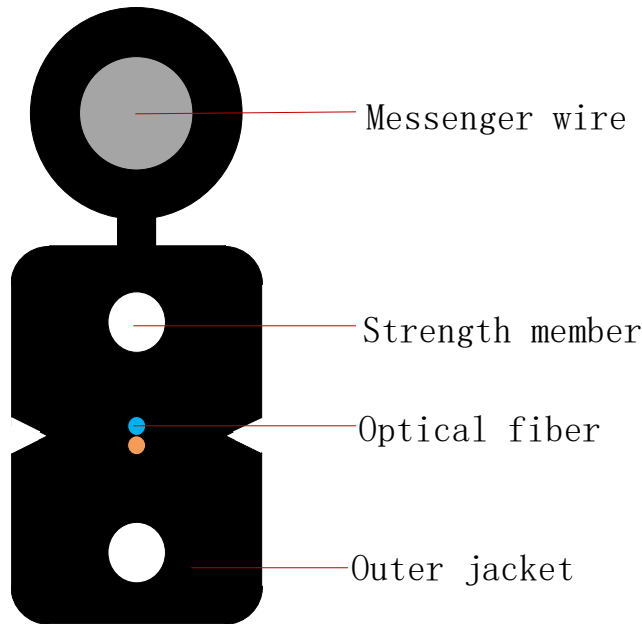

Optical Fiber Type and Properties

Item		Unit	Specification
Fiber Type			G.657A1
Mode field diameter	1310nm	μm	8.6-9.5 ± 0.4
Cladding diameter		μm	125.0 ± 0.7
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245 ± 5
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤0.4
	1550nm	dB/km	≤0.3



Macro-bend loss (1 turn, 10mm radius)	1550nm	dB/km	≤0.75
	1625nm	dB/km	≤1.5
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.657

Item		Unit	Specification
Fiber Type			G.657B3
Mode field diameter	1310nm	μm	8.6-9.5 ± 0.4
Cladding diameter		μm	125.0 ± 0.7
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245 ± 5
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤0.4
	1550nm	dB/km	≤0.3
Macro-bend loss (1 turn, 7.5mm radius)	1550nm	dB/km	≤0.08
	1625nm	dB/km	≤0.25
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.657

Dimensions of Cable Constructions

Item		Parameters	
Fiber	Color	Natural color	Blue Orange
	Number of cores	1	2
Strength member	Material	KFRP	
	Diameter	0.5mm	
Messenger wire	Material	Galvanized steel wire	



	Diameter	1.2mm
Outer jacket	Material	LSZH
	Color	Black
Cable diameter (Rip off the messenger wire)		2.0±0.1mm*3.0±0.1mm
Min. bending radius	Static	15mm
	Dynamic	30mm
Tensile performance	Short term	600N
Crush	Short term	2200N/100mm

Working Condition

Item	Standard	Parameters
Operation temperature	IEC 60794-1-2 F1	-5℃~+50℃

Drum

Cable type	Drum				
	Height (mm)	Width (mm)	Inner diameter (mm)	Length (km)	Drum type
GJYXFCH	300	275	110	1	Plywood wood drum

E-mail: info@sopto.com.cn

Web : <http://www.sopto.com.cn>