




# Cabling Cable GJPFJH

## Product Structure

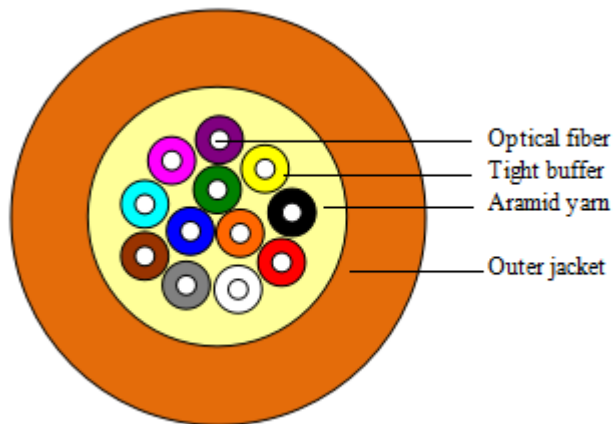

## Product Description

GJPFJH (Tight buffer fiber structure, Aramid yarn strength member, LSZH jacket)

## Standard

YD/T 1258. 4-2005 Indoor fiber optical cable Dual core cable

## Technical Parameters

The way of Cabling	Fiber count	Specifications (mm)	Weight (kg/km)	Tensile(N)		Crush(N)		Bending Radius(mm)	
				Long term	Short term	Long term	Short term	Static	Dynamic
Level	4	4.7	19	130	440	200	1000	10D	20D
Level	6	5.2	25	130	440	200	1000	10D	20D
Level	8	5.8	29	130	440	200	1000	10D	20D
Level	12	6.3	35	130	440	200	1000	10D	20D
Vertical	4	5.0	22	200	660	300	1000	10D	20D



Vertical	6	5.5	27	200	660	300	1000	10D	20D
Vertical	8	6.0	31	200	660	300	1000	10D	20D
Vertical	12	6.5	37	200	660	300	1000	10D	20D

Note: 1.D refers to the cable diameter;

2.The relevant technical parameters can be adjusted according to the customer's demands;

3.PVC and other materials can be used as jacket according to the customer's demands.

E-mail: [info@sopto.com.cn](mailto:info@sopto.com.cn)

Web : <http://www.sopto.com.cn>