




# Break-out Cable GJBFJH

## Product Structure

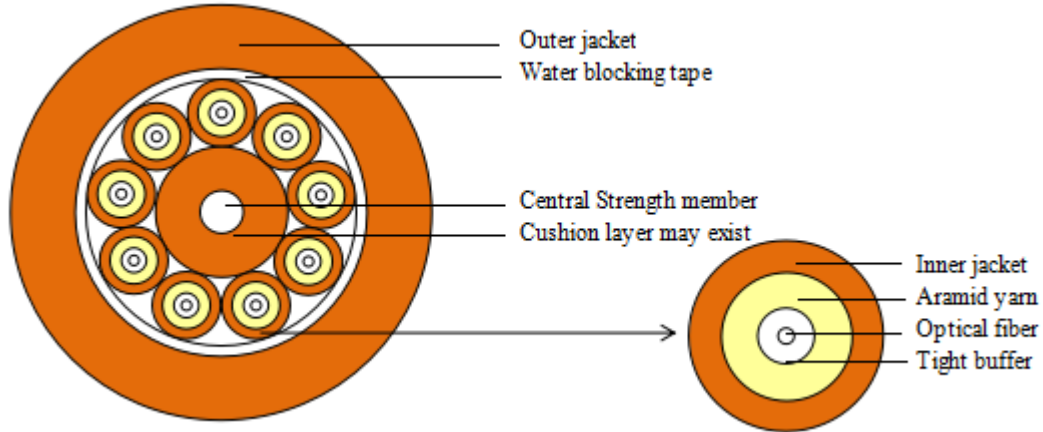

## Product Description

GJBFJH (Tight buffer fiber and Stranded structure, Aramid yarn strength member, Water blocking tape, LSZH jacket)

## Standard

YD/T 1258. 4-2005 indoor fiber optical cable dual core cable

## Technical Parameters

Fiber count	Specifications (mm)	Weight (kg/km)	Tensile(N)		Crush(N)		Bending Radius(mm)	
			Long term	Short term	Long term	Short term	Static	Dynamic
4	7.5	52	210	450	300	1000	10D	20D
6	8.5	70	320	650	300	1000	10D	20D
8	9.5	89	420	850	300	1000	10D	20D
10	10.8	115	600	1200	300	1000	10D	20D



12	12.5	145	600	1200	300	1000	10D	20D
14	11.8	115	650	1300	300	1000	10D	20D
16	12.5	127	750	1500	300	1000	10D	20D
18	12.8	142	1000	2000	300	1000	10D	20D
20	13.3	155	1000	2000	300	1000	10D	20D
22	14.0	167	1000	2000	300	1000	10D	20D
24	14.8	185	1200	2400	300	1000	10D	20D

- Note: 1.D refers to the cable diameter;  
 2.The relevant technical parameters can be adjusted according to the customer’s demands;  
 3.PVC and other materials can be used as jacket according to the customer’s demands.

E-mail: [info@sopto.com.cn](mailto:info@sopto.com.cn)

Web : <http://www.sopto.com.cn>